



RVRX Resilient Seated Gate Valve PN16 flanged

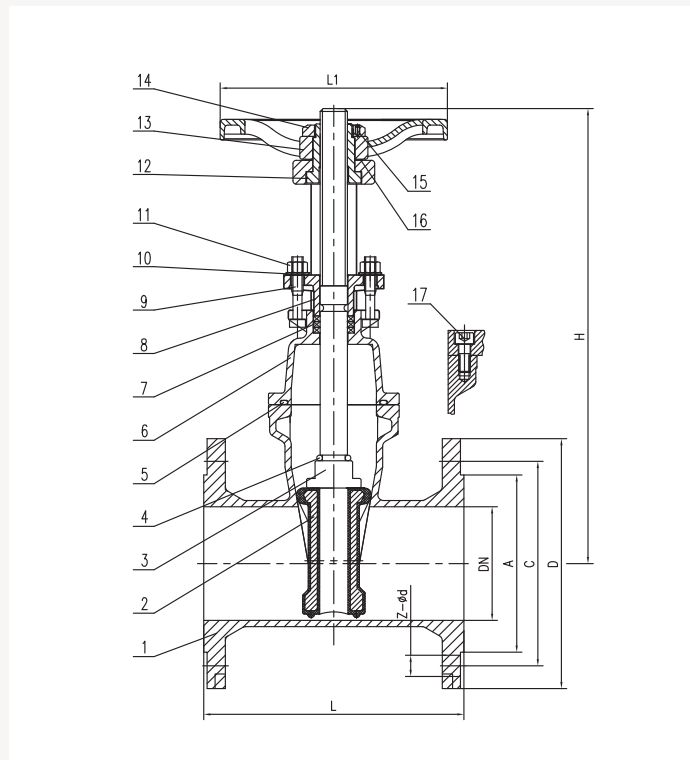

Material specification

RVHX Resilient Seated Gate Valve Flanged 2" to 24"		
No	Component	Material
1	Body	Ductile iron
2	Wedge	Ductile iron + EPDM
3	Stem	Stainless steel SS420
4	O-ring	EPDM
5	Seal ring	Flexible graphite + 304
6	Bonnet	Cast iron QT450-10
7	Packing	Flexible graphite + 304
8	Gland	Cast iron QT450-10
9	Square head bolt	Stainless steel SS304
10	Flat washer	Stainless steel SS304
11	Nut	Stainless steel SS201
12	Stem nut	Manganese brass HMn58-2
13	Handwheel	Cast iron QT450-10
14	Lock nut	Stainless steel SS304
15	Screw	Stainless steel SS304
16	Washer	Bronze C83600
17	Screw	High tensile steel Gr 8.8

BWLX Wafer Concentric Butterfly Valve PN16

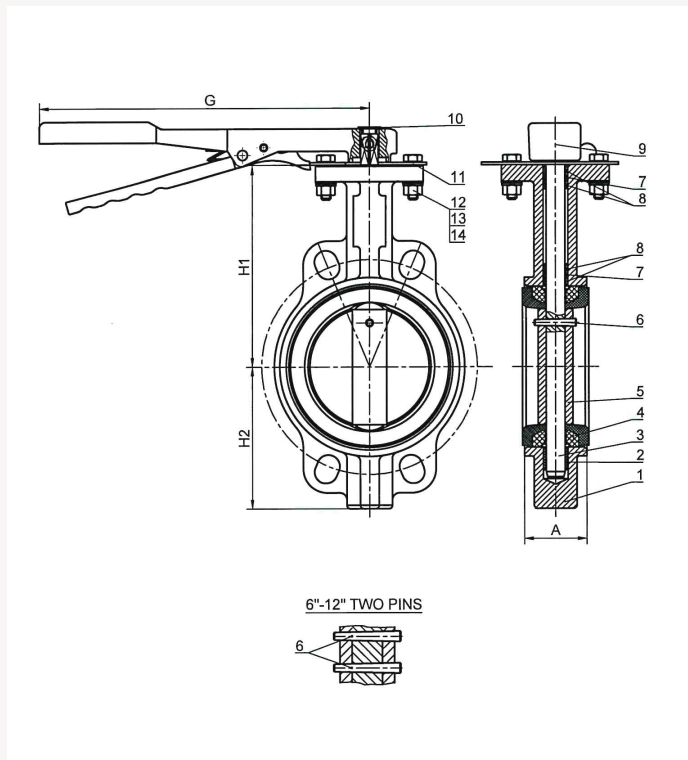

Material specification

BWLX Wafer Concentric Butterfly Valve 2" to 6"		
No	Component	Material
1	Body	Ductile iron
2	Bushing	PTFE
3	Shaft	Stainless steel SS410
4	Seat	EPDM
5	Disc	CF8/DI*/CF8M*/C94500*
6	Pin	Stainless steel SS316
7	O-ring	EPDM
8	Bushing	PTFE
9	Lever	Malleable iron
10	Plastic cover	ABS
11	Notch plate	Stainless steel SS304
12	Bolt	Carbon steel
13	Flat washer	Carbon steel
14	Spring washer	Spring steel 65 Mn

*Variants available to special order. Please contact your local Conex Bänninger representative.